

	Page
I.	SCOPE
II	RELATED DOCUMENTS AND STANDARDS
	SYSTEM OVERVIEW
2.	SYSTEM ARCHITECTURE
3.	SYSTEM SPECIFICATIONS
3.1	TED SYSTEM DIAGRAM
3.2	MEMORY MAP
3.3	POWER CONSUMPTION
3.4	BUS LOADING
3.5	CONFIGURATION
3.6	ENVIRONMENTAL SPECIFICATION
3.7	TIMING CHART
3.8	TIMING DIAGRAM
4.	THE 7360 TEXT DISPLAY CHIP
4.1	OVERVIEW
4.2	FEATURES
4.3	CHIP CHARACTERISTICS
4.3.1	PINOUT
4.3.2	SIGNAL DESCRIPTION
4.4	ELECTRICAL SPECIFICATIONS
4.4.1	ABSOLUTE MAXIMUM RATINGS
4.4.2	VIDEO VOLTAGE SPECIFICATIONS
4.4.3	LUMINANCE LEVELS
4.4.4	COLOR PHASE ANGLES
4.5	GENERAL TIMING
4.5.1	BUS TIMING
4.5.2	DMA TIMING
4.5.2.1	TED DMA TIMING
4.5.2.2	TED DMA TIMING DIAGRAM
4.5.3	VIDEO TIMING
4.5.3.1	HORZ TIMING
4.5.3.2	VERT TIMING
4.5.3.3	VIDEO TIMING DIAGRAM
5.	THE 7501 MICROPROCESSOR
5.1	DESCRIPTION
5.2	PINOUT
5.3	ELECTRICAL SPECIFICATIONS
5.3.1	MAXIMUM RATINGS
5.3.2	ELECTRICAL CHARACTERISTICS
5.4	SIGNAL DESCRIPTION
5.5	PROCESSOR TIMING
5.5.1	TIMING CHART
5.5.2	TIMING DIAGRAM
6.	DYNAMIC RAMS
6.1	ELECTRICAL SPECIFICATIONS
6.2	CHARACTERISTICS
6.2.1	PACKAGE PINOUT
6.2.2	SELECTION CRITERIA
6.3	TIMING
6.3.1	TIMING CHART
6.3.2	TIMING DIAGRAM

7. THE USER PORT
7.1 DESCRIPTON
7.2 PHYSICAL PINOUT
7.3 ELECTRICAL SPECIFICATIONS
7.4 TIMING
7.5 6551, 6529 TIMING
7.6 PLA PROGRAM CHART
7.7 PHI 2, CS CLOCKS

8. THE VIDEO SECTION
8.1 VIDEO INTERFACE
8.2 MODULATOR SPECIFICATIONS
8.3 MONITOR OUTPUT
8.4 VIDEO CONNECTOR PINOUT

9. THE SERIAL BUS
9.1 SERIAL BUS SPECIFICATION
9.2 SERIAL BUS CONNECTOR PINOUT

10. THE EXPANSION BUS
10.1 EXPANSION BUS PINOUT
10.2 EXPANSION BUS SIGNAL DESCRIPTION

11. READ ONLY MEMORY
11.1 SYSTEM ROM DESCRIPTION
11.2 BANKING OPERATION
11.3 ROM ELECTRICAL SPECIFICATION
11.4 ROM PINOUT
11.5 ROM TIMING

12. THE KEYBOARD
12.1 KEYBOARD CONNECTOR PINOUT
12.2 KEYBOARD MATRIX
12.3 KEYBOARD ELECTRICAL SPECIFICATION

13. THE CIRCUIT BOARD
13.1 PHYSICAL DIMENSIONS
13.2 PARTS PLACEMENT

I. SCOPE

This document contains information concerning the architecture, hardware description, timing analysis, peripheral specification and driving software description for the Commodore system based on the 7360 I.C. (hereafter referred to as the TED I.C.) and the TED system. This document does not attempt to fully describe software aspects of the TED system and information concerning this subject can be found in the appropriate documents listed in section II.

1. SYSTEM OVERVIEW

The TED system is based on the 7501 microprocessor, which is an HMOS version of the 6510, working in conjunction with the 7360 Ted video Processor. System RAM consists of 64K bytes of dynamic RAM composed of eight 64k X 1 devices. System program is contained in two 16K X 8 ROMs, and in its standard configuration, consists of Kernel and Basic version 3.5. The current implementation of the architecture for the Ted system supports up to 128K X 8 of ROM banked in 16K sections. ROM can be completely banked out and RAM banked in for a true 64K of RAM (minus two 256 byte pages). This allows 60,671 bytes available for Basic. The ROM/RAM banking is controlled by the 7360 under software control.

Keyboard scanning is done by outputting the row data on the Data bus while addressing a particular register in Ted, which will in turn cause Ted to latch the column information. Joystick scanning is done in the same manner.

Peripherals consist of standard serial bus products, (1541 disk drive, serial printer, ect.) cassette, TTL Serial ASCII which is intended to drive an RS-232 adapter. The expansion port supports ROM cartridges and a parallel disk drive interface.

SUMMARY OF TED SYSTEM FEATURES

- 7501 (6502 compatible) 8 bit CPU
- 7360 VLSI video, voice, DRAM controller
- 64KByte RAM
- 32KByte ROM for use in Kernel and Basic
- 32KByte ROM for Function Key software
- 32KByte ROM for Cartridge software
- Version 3.5 Basic with advanced graphics and DOS
(compatible with C64)
- 40 X 25 display with 128 colors
- 320 X 200 graphics resolution
- 2 Voices and white noise
- 64 keys including function keys
- Screen Editor with virtual windows
- Dual speed system clock for increased processing throughput
- External power supply (same as c64)
- Low chip count, high system integration

2. SYSTEM ARCHITECTURE

The Ted system employs a shared bus concept which allows the video processor and the microprocessor to access the same memory and I/O devices on alternate halves of the system clock. Bus access control is generated by the 7360. To increase microprocessor throughput, when this interleaving is not needed, the system clock doubles in frequency and the microprocessor is allowed full time on the bus. This occurs when no video information is being fetched by the 7360 (horizontal or vertical retrace, blank screen). There is an exception to this, and that is when the 7360 DMA's the 7501 micro to accomplish attribute fetch and character pointer information.

Dynamic RAM control signals are generated by the 7360. /RAS is generated once each memory cycle, while /CAS is generated depending on whether the memory cycle is a DRAM memory cycle or not. MUX is generated to control the multiplex of the Row and Column addresses going to the DRAMs. MUX also controls the holdoff of the R/W line as generated by the 7501. The R/W line is latched by the 7501 until the MUX line goes high signifying the end of the memory cycle. Refresh is provided by the 7360, refreshing 5 row locations (RAS only refresh) every raster line.

Selection of either ROM or RAM is accomplished by writing a bit in a Ted register. When RAM is selected, the whole 64K memory map is comprised of RAM with the exception of 2 registers for 7501 port, 1 page for Ted control registers, and 1 page for I/O. This method yields 60,671 bytes of RAM available for Basic program storage. When ROM is selected, the program residing in ROM appears in place of RAM. The exception to this is a write operation to ROM will always 'bleed through' to underlying RAM.

Kernal and Basic can also be selectively swapped out and replaced with other 16 K sections of ROM. 2 sockets are provided internally for application programs (referred to as function key software) and address space is allocated for 2 ROMs external to the system (cartridge user, ect.). Swapping is taken care of by a Kernal routine that does not swap out, (located at \$FC00).

The cassette port and the Commodore serial bus port are implemented using the zero page ports available on the 7501 and using software control of hardware handshake.

The serial bus works with Commodore serial components, except for older peripherals that have a handshake timing problem.

The User Port is intended for external RS-232 adapters, and modem adapters. Transmission and reception is accomplished using a 6551 ACIA with handshaking assistance from a 6529 single port I.C.

The Joystick ports are functionally compatible with the standard Commodore 5 switch type joystick. They are not compatible with analog type peripherals such as paddles, tablets, etc., as well as not being pin compatible.


The video connector has composite video as well as separate chroma and luminance outputs for use with monitors. The 1701, 1702 type Commodore monitors interface directly to this connector.


The RF output jack supplies an RF signal compatible with the regulations pertaining to TV interface devices, and is switch selectable between channels 3 and 4. Both NTSC and PAL television standards are supported.

3. SYSTEM SPECIFICATIONS

This section covers the range of system operation by discussing various constraints and features of the TEO system as a whole. Included are descriptions of the system as configured and limiting factors of power, loading, and environment.

3.1 TED 64 SYSTEM DIAGRAM

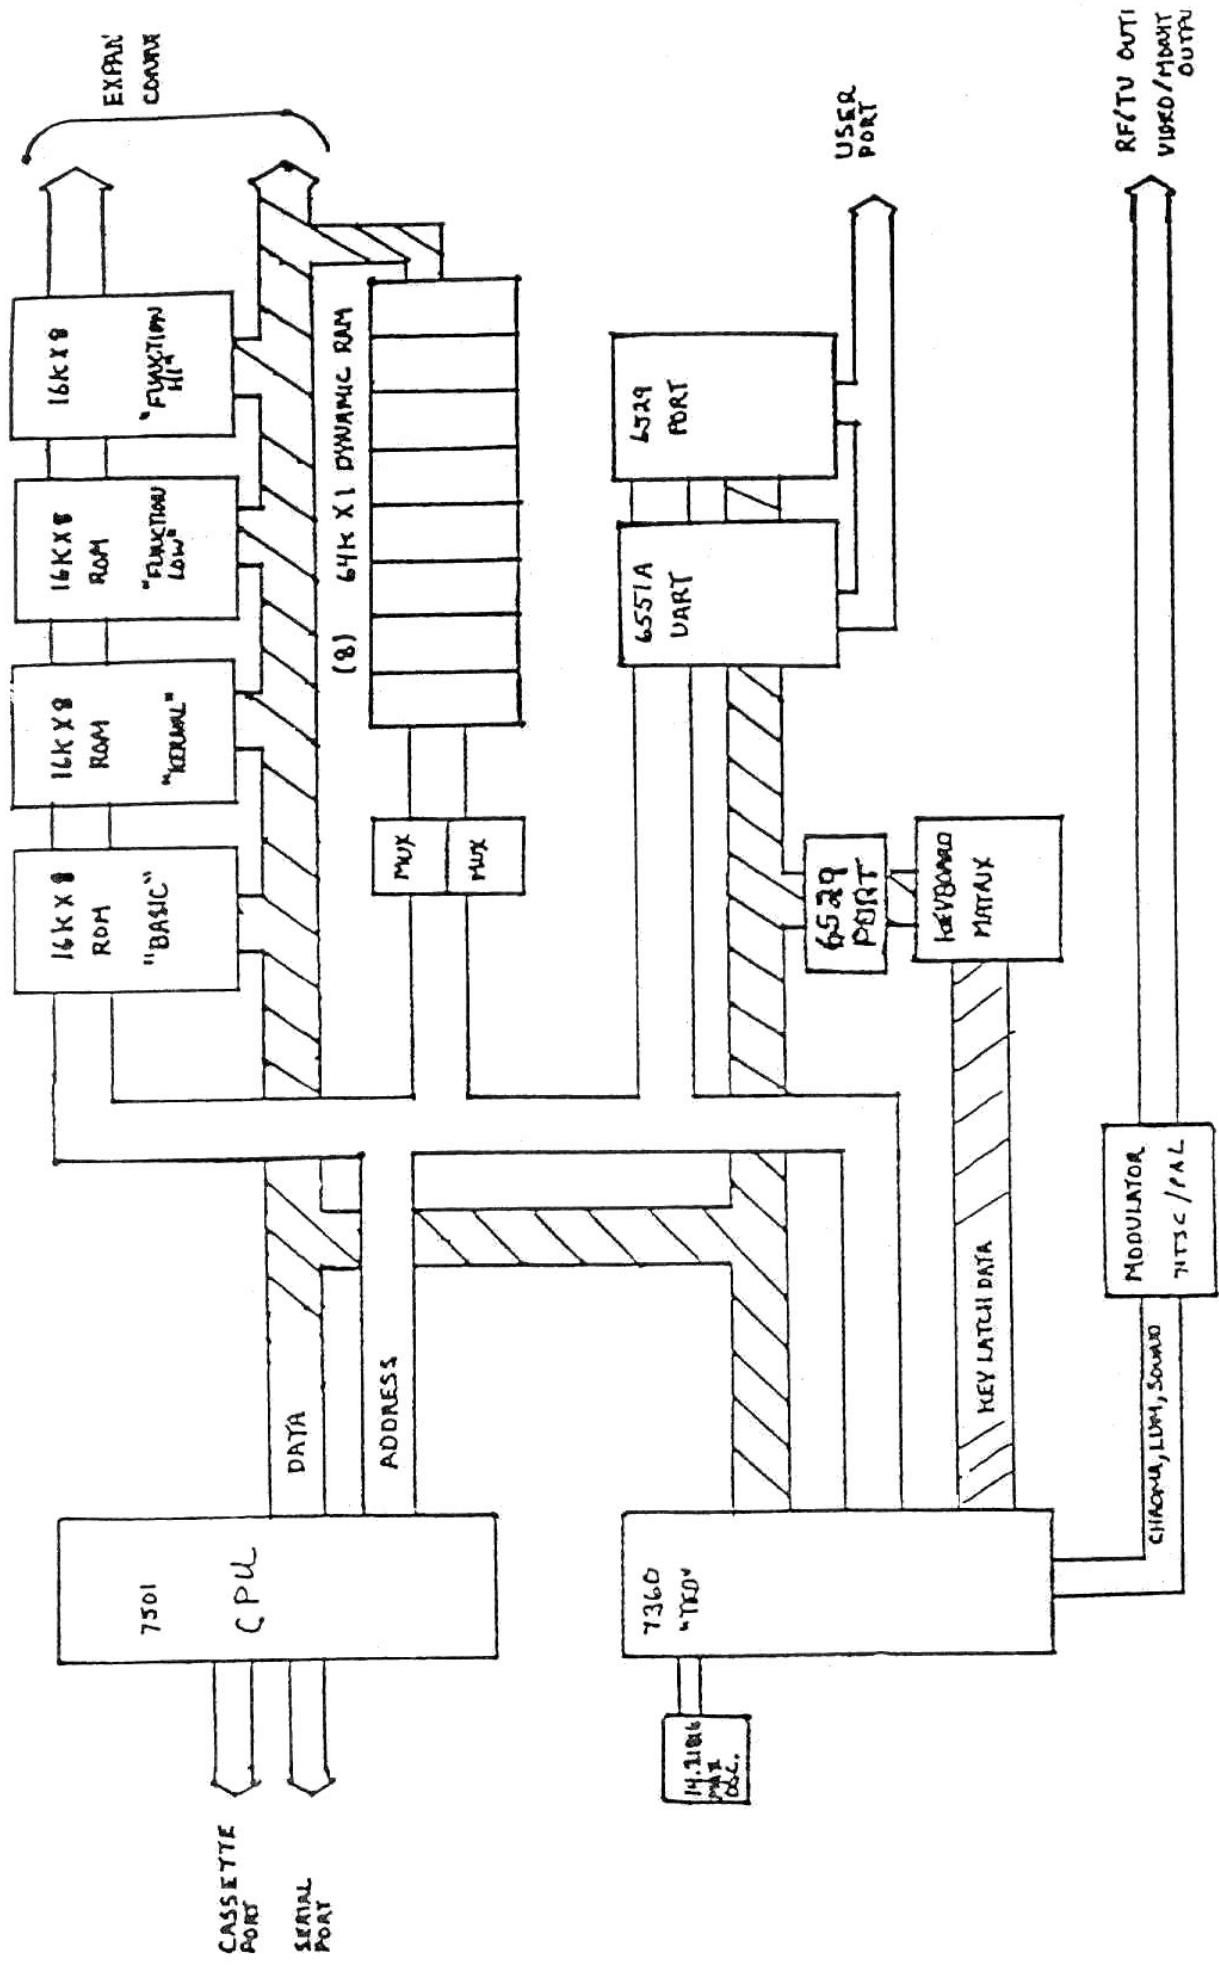

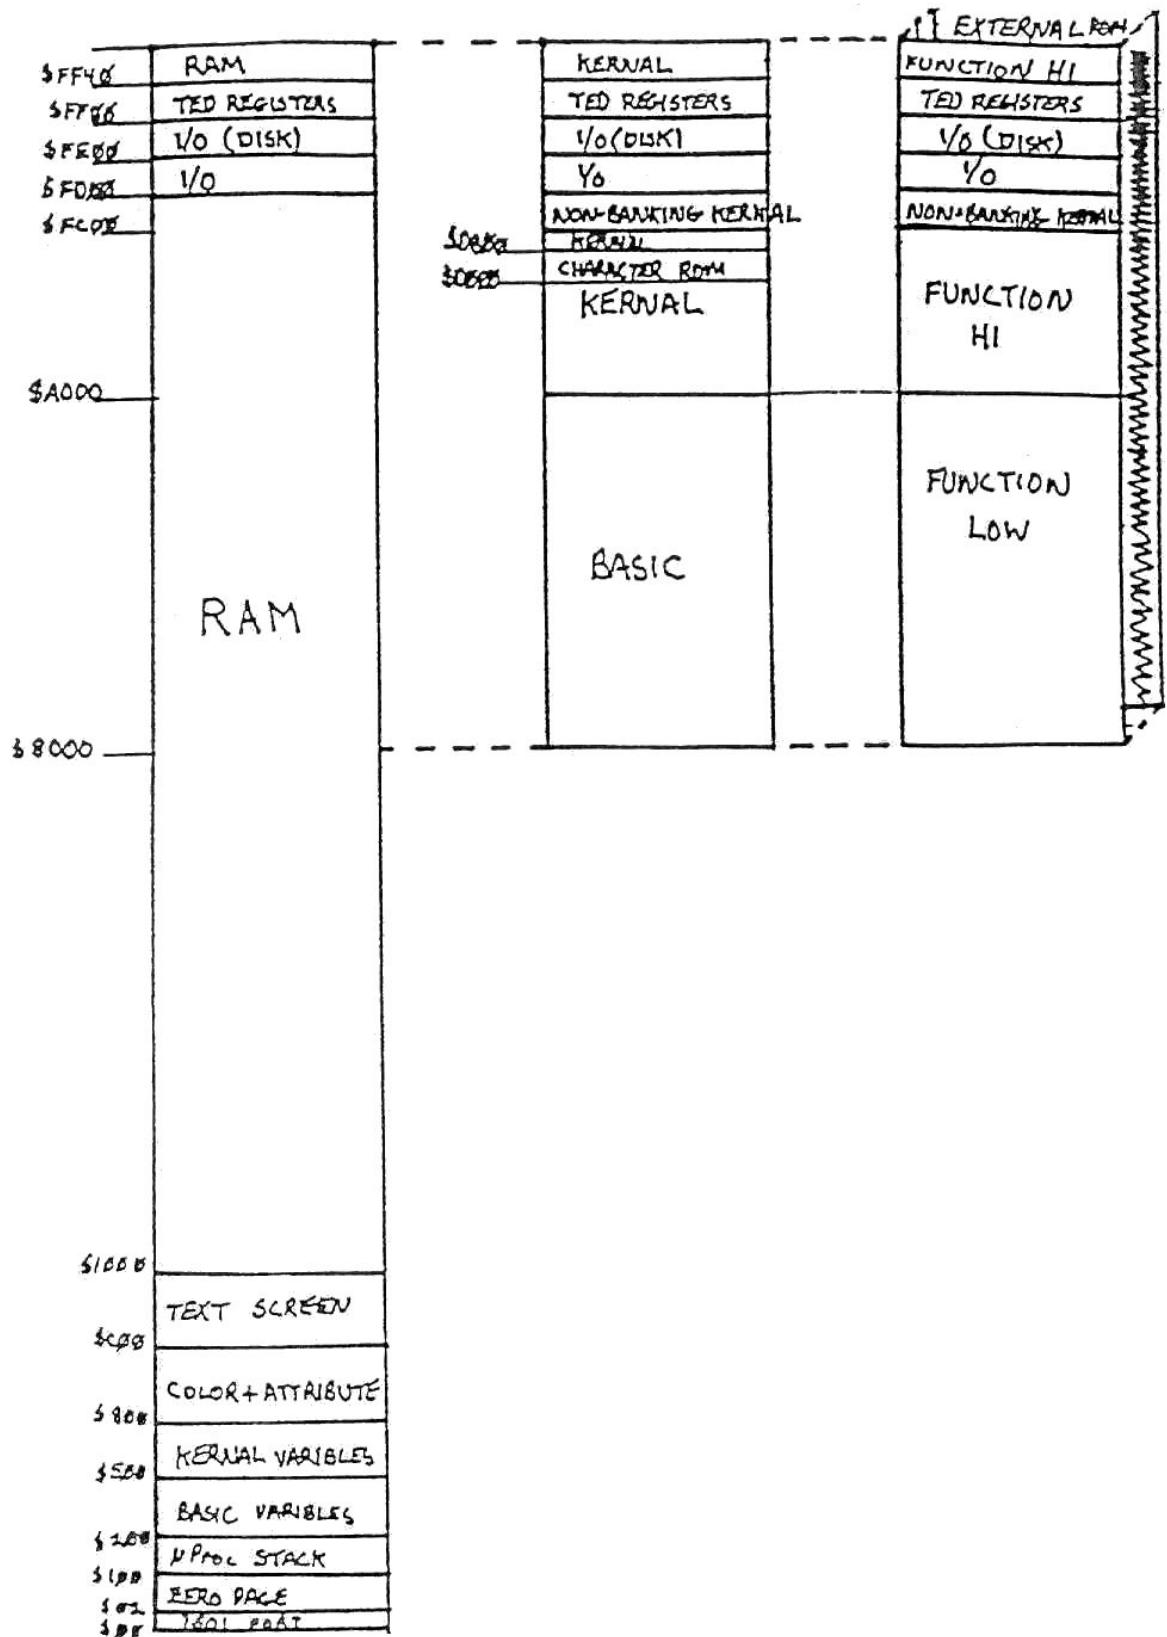

3.2

TED MEMORY MAP

64K

3.3 POWER CONSUMPTION

PART	I TOTAL (TYP)	I TOTAL (MAX)	
7501	80	125	ma
7360	200	250	ma
23128	155	220	ma
74LS257	24	38	ma
modulator	80	150	ma
555	10	15	ma
7406	32	51	ma
74LS08	4	9	ma
74LS04	4	7	ma
7700-xx	85	120	ma
4164-2	336	480	ma
6551A	34	60	ma
6529B	56	80	ma
6529B	56	80	ma
	1156	1685	ma
23128	155	220	ma
	1311	1905	ma
23128	155	220	ma
	1466	2125	ma
RS - 232	1536	2225	ma
**	1.53 A TYP.	2.2 A MAX.	**

W/O FUNCTION KEY SOFTWARE
FUNCTION KEY ROM
TED W/FUNCTION SOFTWARE
CARTRIDGE ROM
TED64 FUNCTION AND CART
TED64 FUNC. W/CART
& RS-232

3.4 BUS LOADING

DEVICE	ADDRESS	DATA	R/W	RAS CAS
7501	12	15	12	-
7360	10	10	10	Pf
4164	-	20	80	Pf
7700	8	-	-	Pf
6551	10	10	10	Pf
(2)6529	-	20	20	Pf
74LS257	5	-	-	Pf
(2)23128	16	16	-	Pf
<hr/>				
	61	91	132	98
	77	107	132	Pf *
	93	123	132	Pf **
				Pf ***

* TED64

** TED64 W/FUNCTION ROMS

*** TED64 W/FUNCTION & CART

4. THE 7360 TEXT DISPLAY CHIP

This chapter will discuss various aspects of the 7360 Text Display chip.

4.1 OVERVIEW

The 7360 (or TED) is intended for low end 6502 family based, personal home computer systems. The 7360 is a 48 pin device which controls video output, (all signals necessary to create composite video), system timing, dynamic RAM control, ROM control, and keyboard scanning. The 7360 contains 34 control registers which are accessed through the standard 6502 microprocessor data bus. The 7360 uses the MOS technology HMOS process, and is upgradeable to HMOS 2.

4.2 FEATURES

HARDWARE FEATURES:

DYNAMIC RAM REFRESH

SOUND GENERATION

PROGRAMMABLE VIDEO TIME STANDARDS
(compatible with either NTSC or PAL standards)

40 COLUMN X 25 ROW CHARACTER DISPLAY

8 X 8 CHARACTER DOT MATRIX

320 X 200 PIXEL RESOLUTION

15 UNIQUE COLORS, 8 LUMINENCE LEVELS

HARDWARE FLASH

HARDWARE CURSOR

HARDWARE REVERSE VIDEO

PROGRAMMABLE CHARACTER INFORMATION SOURCE
(ROM or RAM)

DUAL SPEED CLOCK

SCREEN BLANKING FOR DMA SENSITIVE ENVIRONMENTS

1.3 CHIP CHARACTERISTICS

This section discusses some of the physical characteristics of the TED chip.

1.3.1 PINOUT

PIN	DESIGNATION	DESCRIPTION
1	A2	ADDRESS BIT 2
2	A1	ADDRESS BIT 1
3	A0	ADDRESS BIT 0
4	VCC	POWER SUPPLY +5
5	CS0	LOW ROM CHIP SELECT
6	CS1	HI ROM CHIP SELECT
7	R/W	READ/WRITE LINE
8	/IRQ	INTERRUPT REQUEST
9	MUX	ADDRESS MULTIPLEX CONTROL
10	/RAS	DYNAMIC RAM ROW ADDRESS STROBE
11	/CAS	DYNAMIC RAM COLUMN ADDRESS STROBE
12	QOUT	SYSTEM CLOCK
13	COLOR	CHROMA OUTPUT
14	OIN	MASTER CLOCK
15	K0	KEYBOARD LATCH 0
16	K1	KEYBOARD LATCH 1
17	K2	KEYBOARD LATCH 2
18	K3	KEYBOARD LATCH 3
19	K4	KEYBOARD LATCH 4
20	K5	KEYBOARD LATCH 5
21	K6	KEYBOARD LATCH 6
22	K7	KEYBOARD LATCH 7
23	LUM	COMPOSITE SYNC AND LUMINENCE
24	VSS	POWER SUPPLY GROUND
25	DB0	DATA BIT 0
26	DB1	DATA BIT 1
27	DB2	DATA BIT 2
28	DB3	DATA BIT 3
29	DB4	DATA BIT 4
30	DB5	DATA BIT 5
31	DB6	DATA BIT 6
32	DB7	DATA BIT 7
33	SND	SOUND OUTPUT
34	BA	BUS AVAILABLE
35	AEC	ADDRESS ENABLE CONTROL
36	A15	ADDRESS BIT 15
37	A14	ADDRESS BIT 14
38	A13	ADDRESS BIT 13
39	A12	ADDRESS BIT 12
40	A11	ADDRESS BIT 11
41	A10	ADDRESS BIT 10
42	A9	ADDRESS BIT 9
43	A8	ADDRESS BIT 8
44	A7	ADDRESS BIT 7
45	A6	ADDRESS BIT 6
46	A5	ADDRESS BIT 5
47	A4	ADDRESS BIT 4
48	A3	ADDRESS BIT 3

4.3.2 SIGNAL DESCRIPTION

ADDRESS BUS

Pins 1 thru 3 and 36 thru 48

The 16 bit address bus is bidirectional. As an input, the microprocessor can access any of the 34 TED control registers. In the output mode TED uses the addresses to fetch Video Matrix Pointers, Attribute Pointers or character cell information. For microprocessor interface TED resides in locations FF00-FF3F in memory.

DATA BUS

Pins 25 thru 36

The 8 bit data bus is also bidirectional. The data bus activity can be separated into 2 categories: microprocessor interface and video data interface during the above mentioned fetches.

KEYBOARD LATCH

Pins 15 thru 22

The 8 bit keyboard latch is used as the keyboard interface. Upon instruction by the microprocessor to write to the keyboard latch, the information on the keyboard pins is latched by TED and stored until it is retrieved by the microprocessor on a read keyboard instruction. The 7360 also provides active pull ups on the keyboard matrix lines.

K0 and K1 (2 of the keyboard lines) also provide testing functions. When these pins are externally driven to 10 volts, they provide specific testing features. It should be noted however, that these pins are high impedance and if subjected to high energy electromotive fields, could cause false generation of the testing functions. This can be protected against through use of diodes to insure the potential on K0 and K1 never exceeds VCC. K0 generates a system freeze function, and sets all horizontal flip-flops to force TED into the dynamic RAM refresh period and single clock. All flip-flops are then released to allow their manipulation by the horizontal register. K1 forces the internal clock division into the NTSC mode.

CHIP SELECTS

Pins 5 and 6

TED generates ROM chip selects based on address decoding. CS0 is active during the memory block of 8000-BFFF (HEX). CS1 corresponds to C000-FFFF (HEX) in memory. The ROM area of memory can be banked out to overlay RAM, see the description of Registers 3E and 3F (HEX).

DYNAMIC RAM CONTROL

Pins 9 thru 11

TED generates /RAS and /CAS for dynamic RAM access. The signal MUX is also generated to externally-multiplex the RAM row and column addresses.

READ/WRITE

Pin 7

R/W is an input to TED to distinguish the type of operation to be performed. TED will actively pull up the system read line during all TED fetches. The read signal is qualified with MUX. The pin is an open source output.

INTERRUPT

Pin 8

The interrupt pin is an open drain output. TED contains four interrupt sources: 3 internal timers and the raster comparator.

PHI OUT

Pin 12

For increased processor throughput, TED doubles the frequency of the system clock during horizontal and vertical blanking. The actual single clock boundaries are:

- 1) Raster lines 0-204 and horizontal positions 400-344
- 2) Horizontal positions 304-344

PHI IN

Pin 14

For use in NTSC television systems, TED requires a 14.31818 MHz +/- 70 ppm single phase clock input. For PAL systems, the input clock must be 17.734475 MHZ +/- 70 ppm single phase.

COMPOSITE COLOR

Pin 13

The color output contains all chrominance information, including the color reference burst signal and the color of all display dots. The color output is open source and should be terminated with 1K ohms to ground.

COMPOSITE SYNC AND LUMINANCE Pin 23

The luminance output contains all video synchronization as well as luminance information for the video display. The pin is open drain, requiring an external pullup of 1K Ohm.

SOUND

Pin 33

This pin provides the output of the 2 tone generators. The output must be integrated through an RC network and then buffered to drive an external speaker.

BUS AVAILABLE Pin 34

Bus Available indicates the state of TED with respect to video memory fetches. BA will go low during Phase 1, 3 and will remain low for the entire fetch.

ADDRESS ENABLE CONTROL Pin 35

During double clock mode, AEC is always high allowing the 7501 complete control of the system buses. For single clock time periods, when BA has not gone low, AEC will toggle with PHI2 out. This allows TED PHI1, time to complete its memory accesses of video dot information while the 7501 performs during PHI2. When TED needs both halves of the cycle to perform its customary PHI1 dot fetches and PHI2 attribute and pointer fetches, BA will go low. On the fourth PHI1 out, AEC will remain low until the end of the PHI2 video fetch.

4.4 ELECTRICAL SPECIFICATIONS

This section discusses some of the electrical properties and considerations of the 7360 TED chip.

4.4.1 ABSOLUTE MAXIMUM RATINGS

INPUT VOLTAGE (Vin)	-2V to +7.0 VDC
SUPPLY VOLTAGE (Vcc)	-2V to +7.0 VDC
OPERATING TEMP (Ta)	0 to 70 °C
STORAGE TEMP	-55 to 150 °C
INPUT LEAKAGE CURRENT	-1.0 uA
DYNAMIC CHARACTERISTICS	Vcc = 5.0V +/-5%
INPUT HIGH VOLTAGE (VIH)	Vss+2.4V to Vcc+1V
INPUT LOW VOLTAGE (VIL)	VSS-2V to Vss+.8V
OUTPUT HIGH VOLTAGE (VOH) (IOH=-200uA VCC=4.75VDC)	VSS+2.4V
OUTPUT LOW VOLTAGE (VOL) (IOL=-3.2mA VCC=5.25V)	VSS+.4V
MAX POWER SUPPLY CURRENT	250mA

4.4.2 VIDEO VOLTAGE SPECIFICATIONS

CHROMA OUT	1Vp-p min. w/2VOLT OFFSET OPEN SOURCE
LUM OUT	0-5V (blanking = .5V) OPEN DRAIN

4.4.3 LUMINANCE LEVELS (R7)

LEVEL	VOLTAGE	
00	2.00	V
01	2.4	V
02	2.55	V
03	2.7	V
04	2.9	V
05	3.3	V
06	3.6	V
07	4.1	V
08	4.8	V

4.4.4 COLOR PHASE ANGLES

COLOR	HUE PHASE (relative to SIN, in degrees)	
	NTSC	PAL
BLACK	--	--
WHITE	--	--
RED	70	103
CYAN	250	283
MAGENTA	20	53
GREEN	208	241
BLUE	314	347
YELLOW	134	167
ORANGE	90	129
BROWN	115	148
YLLW-GRN	162	195
PINK	50	83
BLU-GRN	232	265
LT-BLU	290	323
DK-BLU	350	23
LT-GRN	180	213

4.5 GENERAL TIMING

This section explores the various timing considerations and constraints related to the TED chip.

4.5.1 BUS TIMING

PARAMETER	SYMBOL	MIN	MAX	UNIT
TED ADDR SETUP	TADS	-	150	ns
INPUT DATA SETUP	TDSU	50	-	ns
INPUT DATA HOLD	TDH	10	-	ns
OUTPUT DATA STABLE	TDSO	160	-	ns
OUTPUT DATA HOLD	TDHO	80	120	ns
R/W STABLE PERIOD	TRWS	-	178	ns
MUX TO R/W SETUP	TMRWS	-	70	ns
MUX TO R/W HOLD	TMRWH	30	-	ns
CHIP SELECT SETUP	TCSS	-	320	ns
CHIP SELECT HOLD	TCSH	70	-	ns
ADDRESS HOLD	TAH	60	-	ns
ADDRESS IN TRISTATE	TADTH	-	135	ns


4.5.2 DMA TIMING

The 7360 performs DMA's to fetch additional information to maintain a video display. Twice per each row of characters, (a character being defined as a cell 8 X 8 bits) to obtain the attributes for each character and to obtain the character pointer which points to where the character pattern can be found. In bit map mode, these DMA's still occur, but the information is interpreted differently. The sequence of events in a DMA cycle are: 1) The system clock comes out of double speed for 1 cycle. At the same time AEC starts to toggle, allowing the 7360 on the bus. 2) The Bus Available line goes low. 3) Three cycles are given to the 7501 to complete operation before DMA begins. 4) 40 cycles of single clock where the 7360 is doing 2 fetches per cycle. 5) RA goes high at the same time as AEC allowing the 7501 back on the bus. 6) 5 cycles follow of single speed where the 7360 is engaged in refreshing the dynamic RAM. 7) 16 cycles of double speed (equiv. to 8 cycles of single). 8) If last DMA was row 8 of character, then DMA for row 1 of next character is initiated. If screen is blanked, the 5 cycles of single speed are still present for dynamic RAM refresh.

4.5.2.1 TED DMA TIMING (REFER TO 4.5.2.2 TED DMA TIMING DIAGRAM)

	cycles	time	
TDMA	40	46us	TIME, DMA
THALT	3	3us	TIME, HALT
TRFSH	5	5us	TIME, REFRESH
TDS	16	9us	TIME, DOUBLE SPEED
TS	1	1us	TIME, SYNCHRONIZE
		<u>64μs - 2μs</u>	

Diagram 4.5.2.2 represents the occurrence of when two DMAs are 'back to back', I.E. character row 8 DMAs, then character row 1 of the next character DMAs, separated only by one horizontal retrace.

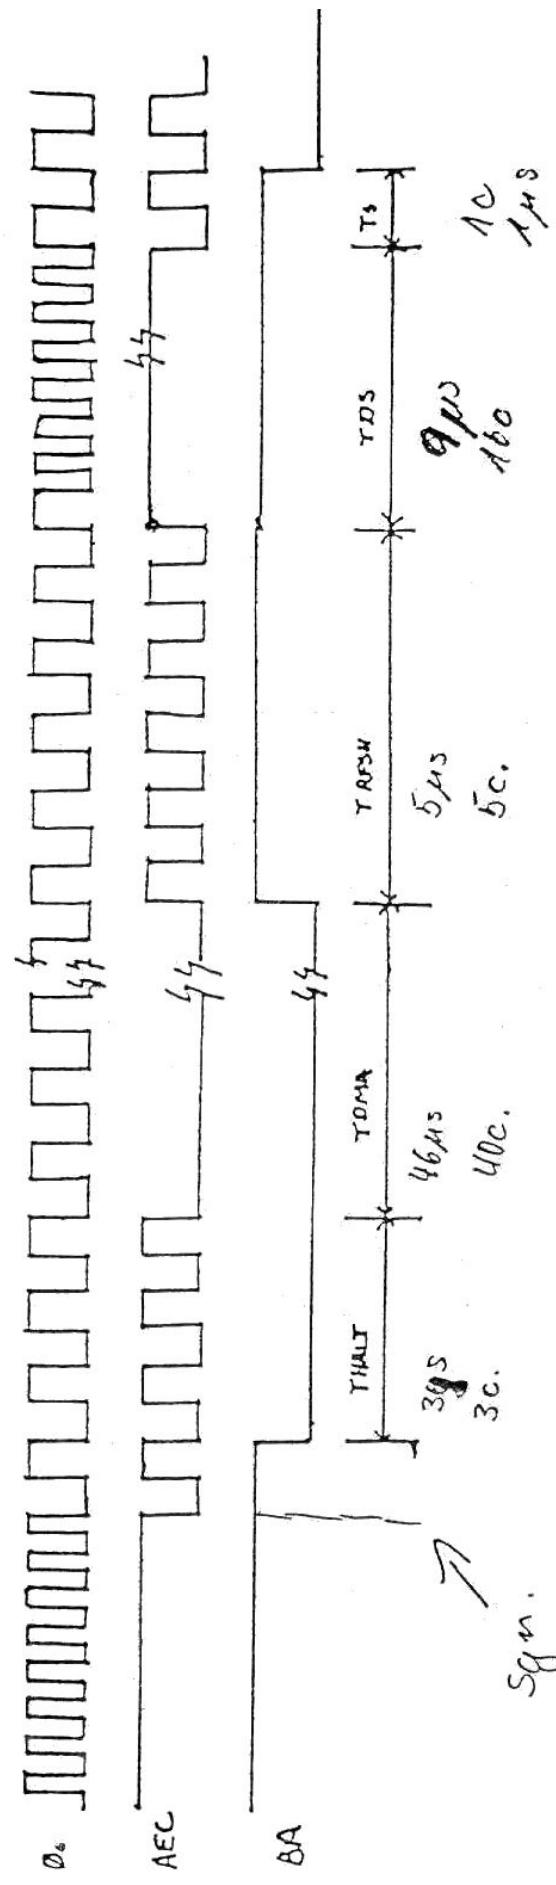

4.5.2.2 TED DMA TIMING DIAGRAM

5. THE 7501 MICROPROCESSOR

This section describes some of the properties and functions of the type 7501 microprocessor.

5.1 7501 DESCRIPTION

The 7501 is an HMOS version of the 6502 family or more specifically, the 6510CBM. The 7501 is software compatible with existing 6502, 6510 code. The 7501 contains a 7 bit bi-directional port used to directly drive the serial bus and cassette. The port is at location \$0000 while the data direction register is at \$0001. The 7501 is Tri-statable and through use of the AEC (address enable control) line and is used extensively in the TED shared bus concept. DMA is accomplished using the AEC line and the RDY line (called BA on TED). A control line is provided (GATE IN) to hold off the R/W line until /RAS makes the transition from low to hi. This prevents the Read line from making an early transition to the write state which would cause an improper Early Write Cycle to occur.

5.2 7501 PINOUT

PIN	NAME	DESCRIPTION
1	PHI IN	SYSTEM CLOCK INPUT
2	RDY	DMA RQST
3	/IRQ	INTERRUPT RQST
4	AEC	ADDRESS ENABLE CONTROL
5	VCC	POWER SUPPLY +5V.
6	A0	ADDRESS BIT 0
7	A1	ADDRESS BIT 1
8	A2	ADDRESS BIT 2
9	A3	ADDRESS BIT 3
10	A4	ADDRESS BIT 4
11	A5	ADDRESS BIT 5
12	A6	ADDRESS BIT 6
13	A7	ADDRESS BIT 7
14	A8	ADDRESS BIT 8
15	A9	ADDRESS BIT 9
16	A10	ADDRESS BIT 10
17	A11	ADDRESS BIT 11
18	A12	ADDRESS BIT 12
19	A13	ADDRESS BIT 13
20	GND	POWER SUPPLY GROUND
21	A14	ADDRESS BIT 14
22	A15	ADDRESS BIT 15
23	GATE IN	R/W GATE
24	P7	PORT BIT 7
25	P6	PORT BIT 6
26	P4	PORT BIT 4
27	P3	PORT BIT 3
28	P2	PORT BIT 2
29	P1	PORT BIT 1
30	P0	PORT BIT 0
31	DB7	DATA BIT 7
32	DB6	DATA BIT 6
33	DB5	DATA BIT 5
34	DB4	DATA BIT 4
35	DB3	DATA BIT 3
36	DB2	DATA BIT 2
37	DB1	DATA BIT 1
38	DB0	DATA BIT 0
39	R/W	READ/WRITE
40	RES	RESET

5.3 7501 ELECTRICAL SPECIFICATIONS

This section describes some of the electrical constraints and specifications of the system.

5.3.1 MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Supply Voltage	Vcc	-0.3 to +7.0	Vdc
Input Voltage	Vin	-0.3 to +7.0	Vdc
Operating Temperature	Ta	0 to +70	C
Storage Temperature	Tsts	-55 to +150	C

5.3.2 ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Min	Typ	Max	Unit
Input High Voltage Phi0(in) /RES,P0-P7,/IRQ,Data	VIH	Vss+2.4 Vss+2.2	---	Vcc ---	Vdc Vdc
Input Low Voltage Phi0(in) /RES,P0-P7,/IRQ,Data	VIL	Vss-0.3 ---	---	Vss+0.5 Vss+0.8	Vdc Vdc
Input Leakage Current (Vin=0 to 5.25V, Vcc=5.25V) Logic Phi0(in)	Iin	---	---	2.5 10.0	uA uA
3-State(Off) Inp. Cur. (Vin=0.4 to 2.4V, Vcc=5.25V) Data Lines	ITSI	---	---	10.0	uA
Output High Voltage (IOH=-100uAdc, Vcc=4.75V) Data,A0-A15,R/W,P0-P7	VOH	Vss+2.4	---	---	Vdc
Output Low Voltage (IOL=1.6mAdc, Vcc=4.75V) Data,A0-A15,R/W,P0-P7	VOL	---	---	Vss+0.4	Vdc
Power Supply Current	ICC	---	125	---	mA
Capacitance (Vin=0,Ta=25 C, f=1MHz) Logic,P0-P7 Data A0-A7 Phi1 Phi2	C Cin Cout Cout CPHi1 CPHi2	---	---	10 15 12 50 80	pF pF pF pF pF

5.4 SIGNAL DESCRIPTION

CLOCK (PHI 0) - This is the dual speed system clock and is a standard TTL level input.

ADDRESS BUS (A0 - A15) - TTL output. Capable of driving 2 TTL loads at 130 pF.

DATA BUS (D0 - D7) - Bi-directional bus for transferring data to and from the device and the peripherals. The outputs are tri-state buffers capable of driving 2 standard TTL loads and 130pF.

RESET - This input is used to reset or start the processor from a power down condition. During the time that this line is held low, writing to or from the processor is inhibited. When a positive edge is detected on the input, the processor will immediately begin the reset sequence. After a system initialization time of 6 cycles, the mask interrupt flag will be set and the processor will load the program counter from the contents of memory locations \$FFFC and \$FFFF. This is the start location for program control. After VCC reaches 4.75 volts in a power up routine, reset must be held low for at least 2 cycles. At this time the R/W line will become valid.

INTERRUPT REQUEST (IRQ) - TTL input, request that the processor initiate an interrupt sequence. The processor will complete execution of the current instruction before recognizing the request. At that time, the interrupt mask in the Status Code Register will be examined. If the interrupt mask is not set, the processor will begin an interrupt sequence. The Program Counter and the Processor status register will be stored on the stack and the interrupt disable flag is set so that no other interrupts can occur. The processor will then load the program counter from the memory locations \$FFFE and \$FFFF.

ADDRESS ENABLE CONTROL (AEC) - The Address Bus is only valid when the AEC line is high. When low, the address bus is in a high impedance state. This allows easy DMA's for shared bus systems.

I/O PORT (P0-P4,P5,P7) - Bidirectional port used for transferring data to and from the processor directly. The Data Output Register is located at location \$0001 and the Data Direction Register is located at location \$0000.

R/W - TTL level output from processor to control the direction of data transfer between the processor and memory, peripherals, etc. This line is high for reading memory and low for writing. This line is latched by the Gate In line to synchronize between a DRAM memory cycle and the processor clock cycle. If AEC is low when Gate In makes a low to high transition, the R/W line will go to a high impedance until the next transition of the Gate In line and AEC is high prior to the transition.

GATE IN - TTL level input, used to gate the R/W line to prevent the R/W line from going low during a read cycle, before RAS and CAS go high (resulting in a Read/Write cycle). Normally connected to the MUX line in a system configuration to synchronize the DRAM memory cycle to the processor clock cycle.

RDY - Ready, TTL level input, used to DMA the 7501. The processor operates normally while RDY is high. When RDY makes a transition to the low state, the processor will finish the operation it is on, and any subsequent operation if it is a write cycle. On the next occurrence of read cycle the processor will halt, making it possible to tri-state the processor to gain complete access to the system bus.

5.5 PROCESSOR TIMING


This section explores the timing considerations of the 7501 processor unit.

5.5.1 TIMING CHART

Electrical Characteristics $V_{cc} = 5V \pm 5\%$, $V_{ss} = 0V$, $TA = 0^{\circ}C$ to $70^{\circ}C$

Characteristic	Symbol	Min	Max	Units
MUX input high	TMH	60	110	ns
AEC setup time	TAEC	25	60	ns
MUX to RW setup or tri-state	THRWS		70	ns
MUX to RW hold	THRWH	30		ns
Up data setup from PH0	TMDS		130	ns
Up write data hold	THW	60		ns
Up data setup from Mux	TMXDS		120	ns
Data bus to tri-state from MUX	TMXDT	30		ns
Data bus to tri-state from AEC	TAEDIT		120	ns
Read data stable	TDSU	40		ns
Read data hold	THR	40		ns
Address setup from PH0	TADS	40	150	ns
Address hold	THA	40		ns
Address setup from AEC	TAADIS		75	ns
Address tri-state from AEC	TAEAT		120	ns
Port input setup	TPDSU	105		ns
Port input half	TPDH	65		ns
Port output data valid	TPDW		195	ns
Cycle time	TCYC	500		ns
PH0(in) pulse width @1.5V	PWHPHO	250	275	ns
PH0(in) rise time	TRPHO		10	ns
PH0(in) fall time	TFPHO		10	ns
RDY setup time	TRDY	80		ns

5.5.2 7501 TIMING DIAGRAM

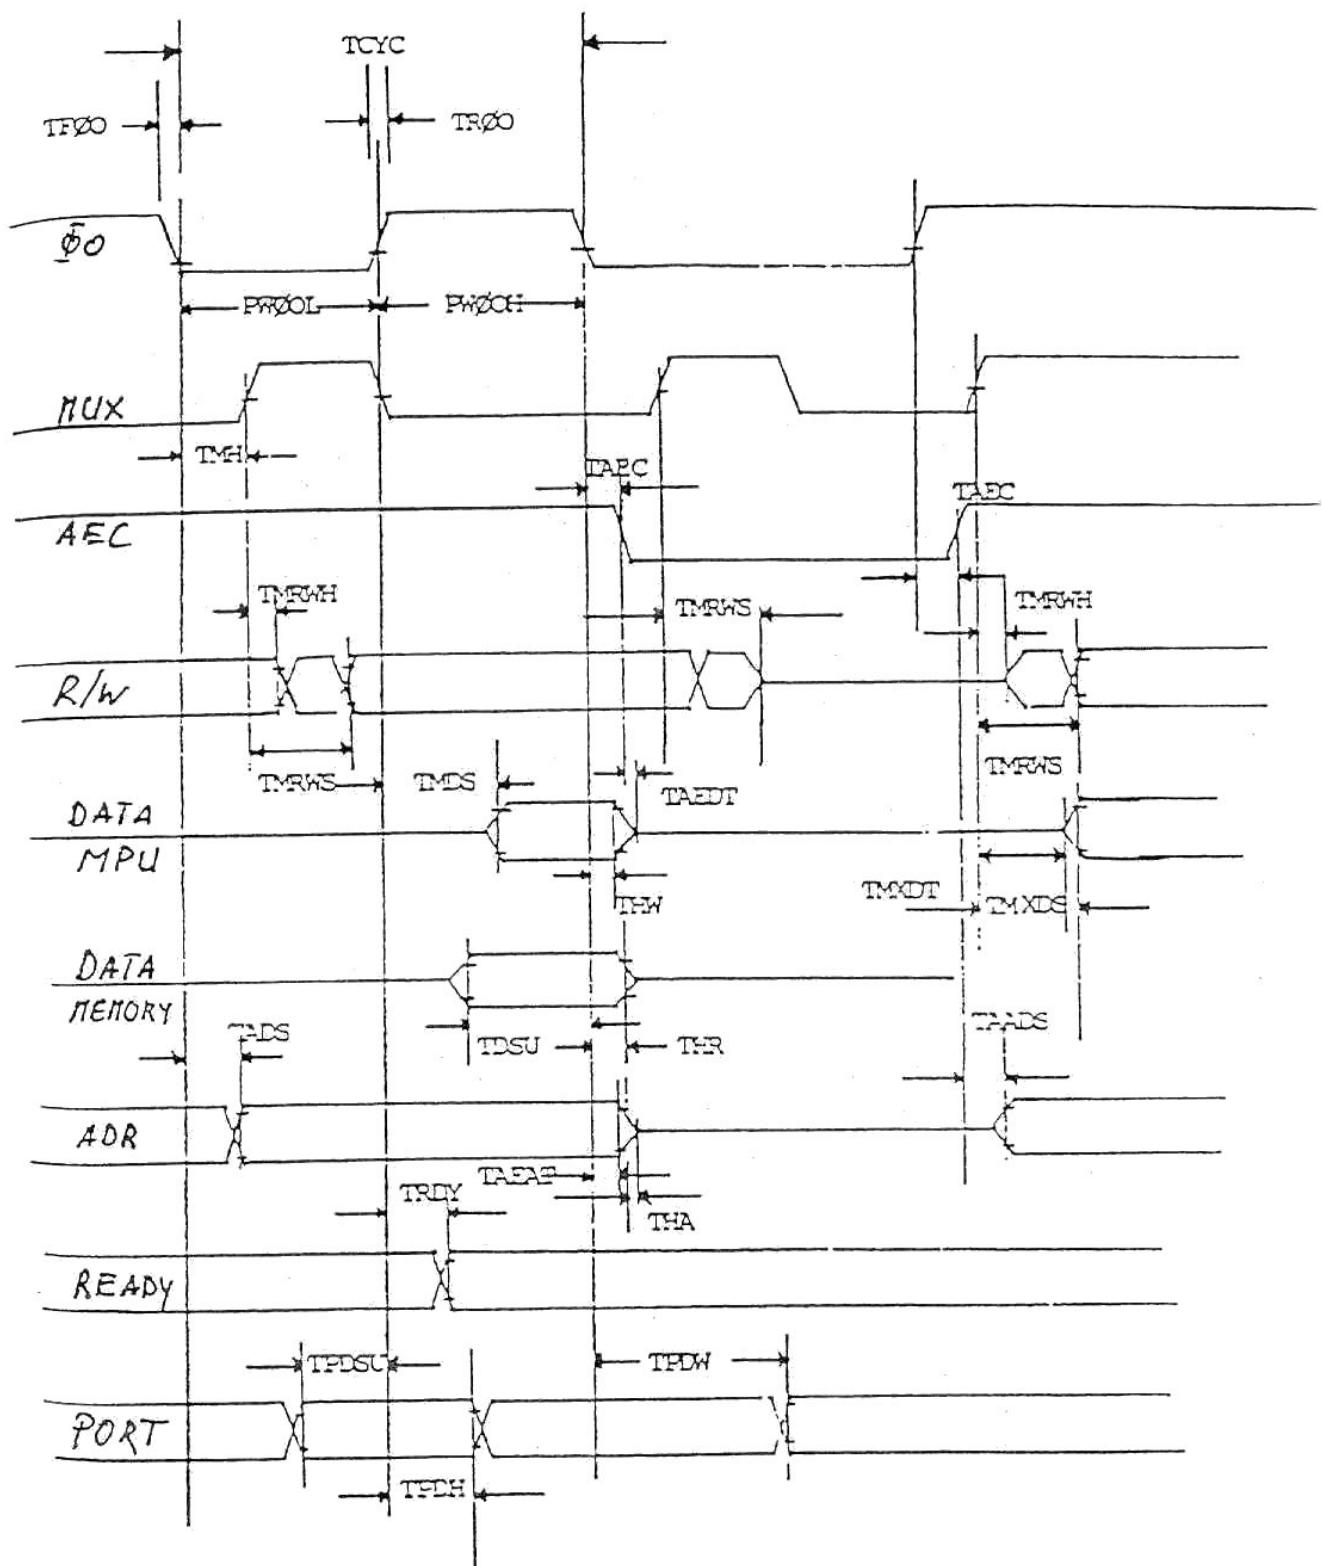

6. DYNAMIC RAMS

This chapter covers the constraints and features of dynamic random access memories used in the TED system.

6.1 ELECTRICAL SPECIFICATIONS

INPUT VOLTAGE (Vin)	-1V to +7.0 VDC
SUPPLY VOLTAGE (Vcc)	-1V to +7.0 VDC
OPERATING TEMP (Ta)	0 to 70 °C
STORAGE TEMP	-55 to 150 °C
INPUT LEAKAGE CURRENT	-10.0 uA
DYNAMIC CHARACTERISTICS	Vcc = 5.0V +/-5%
INPUT HIGH VOLTAGE (VIH)	Vss+2.4V to Vcc+1V
INPUT LOW VOLTAGE (VIL)	VSS-1V to Vss+.8V
OUTPUT HIGH VOLTAGE (VOH) (IOH=-200uA VCC=4.75VDC)	VSS+2.4V
OUTPUT LOW VOLTAGE (VOL) (IOL=-4.2mA VCC=5.25V)	VSS+.4V
MAX POWER SUPPLY CURRENT	80mA

6.2 CHARACTERISTICS

This section covers some of the characteristics of the 64K by 1 bit RAM that is used in the TDI 64 system.

6.2.1 PACKAGE PINOUT

PIN	NAME	DESCRIPTION
1	NC	
2	Din	DATA IN
3	/WE	WRITE ENABLE (ACTIVE LOW)
4	/RAS	ROW ADDRESS STROBE (ACTIVE LOW)
5	A0	ADDRESS BIT 0
6	A2	ADDRESS BIT 2
7	A1	ADDRESS BIT 1
8	VCC	POWER SUPPLY +5
9	A7	ADDRESS BIT 7
10	A5	ADDRESS BIT 5
11	A4	ADDRESS BIT 4
12	A3	ADDRESS BIT 3
13	A6	ADDRESS BIT 6
14	Dout	DATA OUT
15	/CAS	COLUMN ADDRESS STROBE (ACTIVE LOW)
16	VSS	POWER SUPPLY GROUND

6.2.2 SELECTION CRITERIA

The TDI system uses low cost 200 ns access RAMs. Qualified parts must meet all timing parameters as specified in section 6.3.1 'TIMING CHART' and 6.3.2 'TIMING DIAGRAM'.


6.3 TIMING

This section illustrates the required timing constraints in dealing with DRAM.


DRAM TIMING DIAGRAM

■ TIMING WAVEFORMS

● READ CYCLE

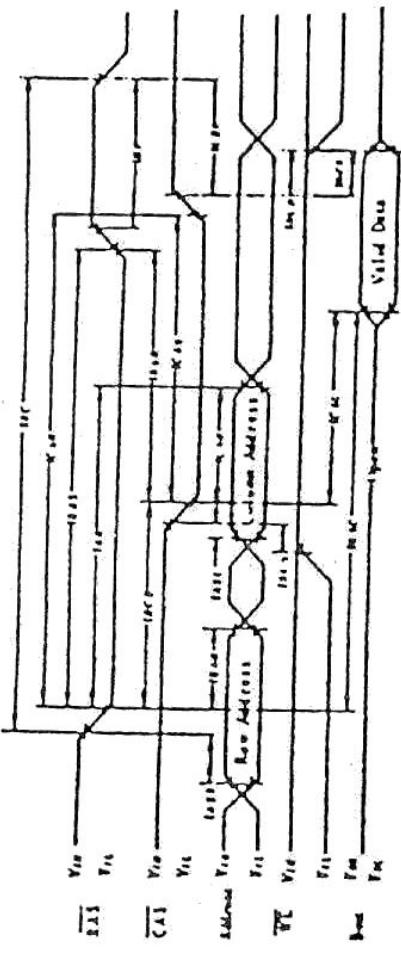


● WRITE CYCLE

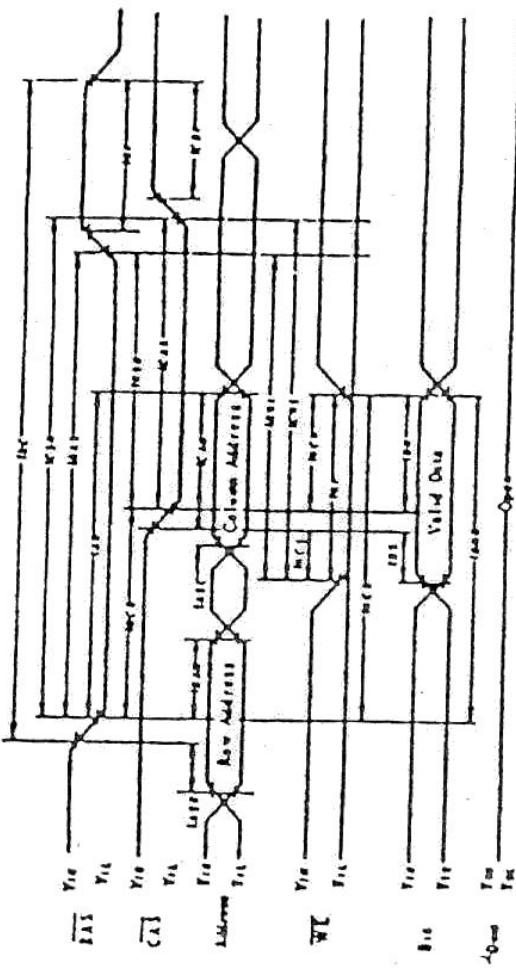


● READ-WRITE/READ-MODIFY-WRITE CYCLE

• READ-WRITE/READ-MODIFY-WRITE CYCLE

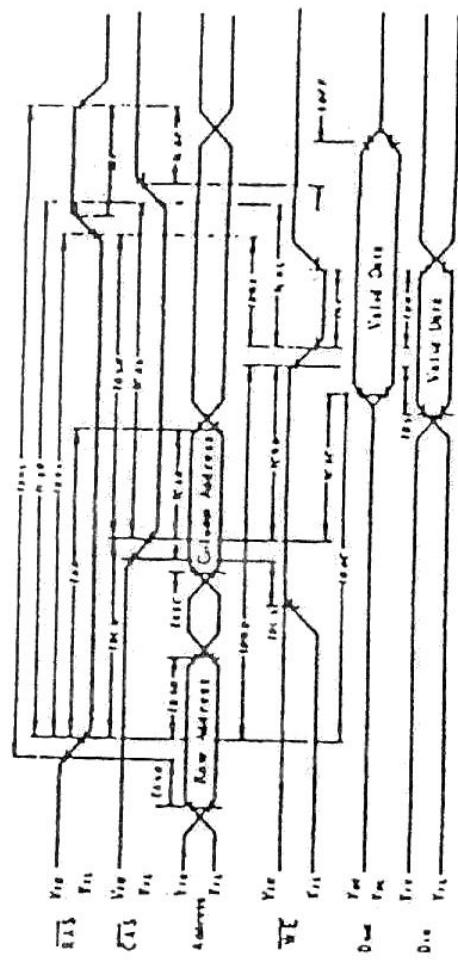

• "RAS-ONLY" REFRESH CYCLE

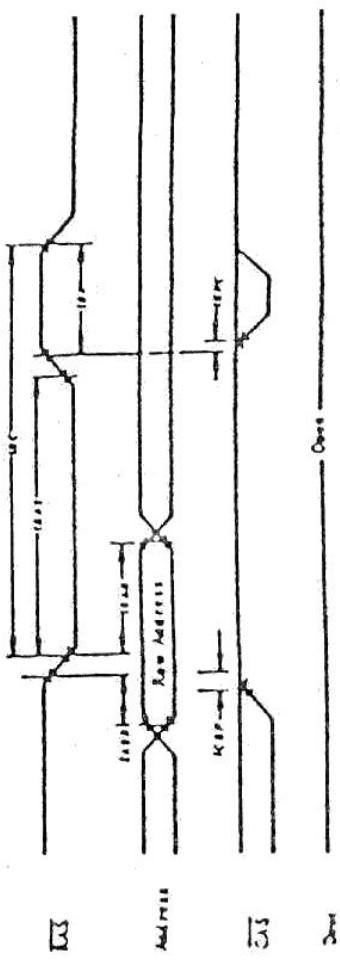

7. THE USER PORT

This chapter details the system User Port.

7.1 DESCRIPTION

The USER PORT is included to allow various terminal and modem devices to connect to the TED system. Transmission and reception is via a 6551 ACIA, with handshaking assistance from a 6529 single port device. The 6551 and the 6529 are each accessible to the TED system in software, thus allowing their programming for various applications.

The 6551 ACIA is enabled by addresses \$FD00 to \$FD0F. The least significant two bits of the address will choose the mode, which may be set for transmit/recieve, receive status, or programming of either the command register or the control register. Similarly, the 6529 is activated by the addresses \$FD10 to \$FD1F. It permits seven bits of either input or output, depending upon the status of the Read/Write line, eighth bit, bit two to be exact, is used as the cassette sense input. It may be possible to utilize this bit if certain precautions are taken in software. (I.E. Insure that cassette sense is not grounded.)

The User Port itself provides access to various signals generated by these two chips, in addition to the ATN and Buffered Reset (BRESET) lines of the TED system. The port also provides ground, +5VDC and +9VAC for use by connected devices.

7.2 PHYSICAL PINOUT

PIN	NAME	DESCRIPTION	DIRECTION
A	GND	Ground	-----
B	P0	I/O Port Bit 0	Input/Output
C	RxD	Recieve Data	Input
D	RTS	Request to Send	Output
E	DTR	Data Terminal Ready	Output
F	P7	I/O Port Bit 7	Input/Output
H	DCD	Data Carrier Detect	Input
J	P6	I/O Port Bit 6	Input/Output
K	CTS	Clear to Send	Input
L	DSR	Data Set Ready	Input
M	TxD	Transmit Data	Input
N	GND	Ground	Output
1	GND	Ground	-----
2	+5	+5 VAC	-----
3	/BRESET	Buffered System Reset	Output
4	P2/CST SENSE	I/O Port Bit 2	Input/Output
5	P3	I/O Port Bit 3	Input/Output
6	P4	I/O Port Bit 4	Input/Output
7	P5	I/O Port Bit 5	Input/Output
8	RxC	Recieve Clock	Input/Output
9	ATN	Attention	Output
10	+9	+9 VAC	-----
11	+9	+9 VAC	-----
12	GND	Ground	-----

7.3 ELECTRICAL SPECIFICATIONS

I/O Ports (P0,P2..P7)

These ports are capable of driving up to four TTL type loads each in output configuration.

Buffered Reset (/BRESET)

The buffered reset line is capable of driving at least one TTL level load. It can drive a total of ten TTL loads between the User Port, the Serial Port, and the Expansion Port.

Attention (ATN)

This line is capable of driving at least one TTL level load. It can drive a total of ten TTL loads between the User Port and the Serial Port.

Receive Data (RxD)

The Receive Data input may be driven by a single TTL level driver.

Other Inputs (DCD, DSR, CTS)

The remaining data inputs are buffered by TTL buffers. Each may be driven by a single TTL level driver. CTS is sensed via 6529 under software control.

Receive Clock (RxC)

The Receive Clock, when acting as an output, can drive a single TTL level load. As an input, it must be driven by at least one TTL level load.

Transmit Data (TxD)

The Transmit Data output is capable of driving a single TTL level load.

Other Outputs (RTS, DTR)

The remaining outputs are each buffered by a TTL buffer, thus each of them will drive ten TTL level loads.

Five volt source (+5)




The five volt source is regulated DC, capable of supplying 100 mA worst case.

Nine volt source (+9)

The nine volt source is an unregulated nine volt (RMS) supply, capable of supplying a worst case current of 400 DC mA.

7.4 TIMING


PARAMETER	SYMBOL	MIN	MAX	UNIT
Transmit/Receive	Tccy	400	-	ns
Clock Rate				
Transmit/Receive	Tch	175	-	ns
Clock High Time				
Transmit/Receive	Tcl	175	-	ns
Clock Low Time				
XTAL1 to TxD	Tdd	-	500	ns
Propagation Delay				
Propagation Delay (/RTS, /DTR)	Tdly	-	500	ns
/IRQ Propagation Delay (Clear)	Tira	-	500	ns

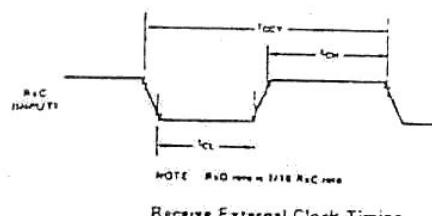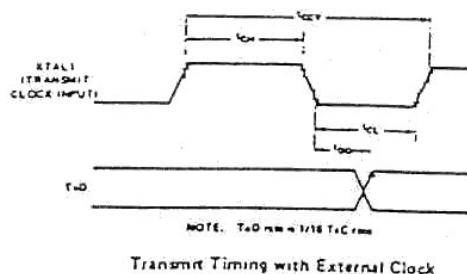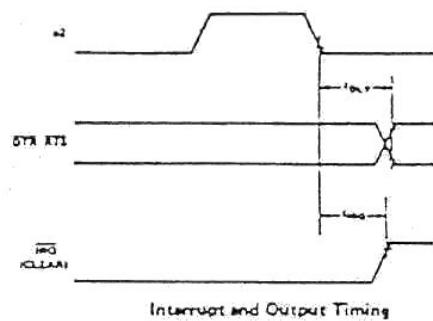


6551, 6529 TIMING

PARAMETER	SYMBOL	MIN	MAX	UNIT
PHI 2 PW	PW02	248	350	ns
ADDRESS SET UP TIME	TACR	72	-	ns
	TACW			
ADDRESS HOLD	TCAH	25	-	ns
	TCAR			
R/W SETUP	TWCW	71	-	ns
	TWCR			
R/W HOLD	TCWH	93	-	ns
	TWCR			
DATA BUS SETUP	TDCW	148	-	ns
READ ACCESS	TCDR	195	-	ns
READ DATA HOLD	THR	35	-	ns

Write Cycle

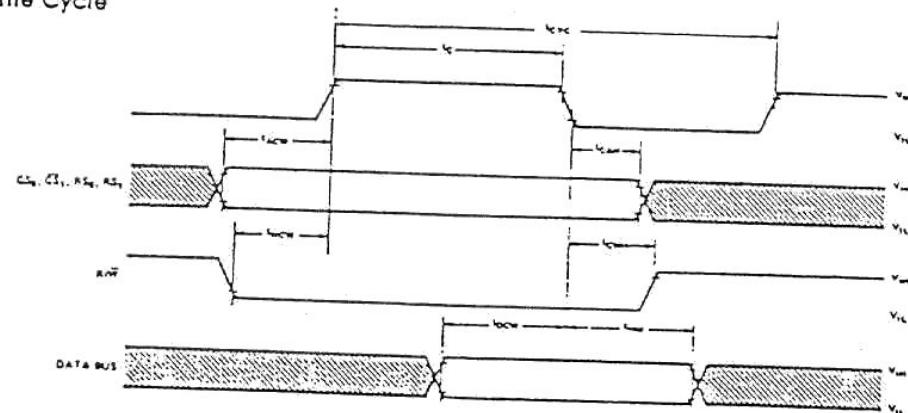


Read Cycle

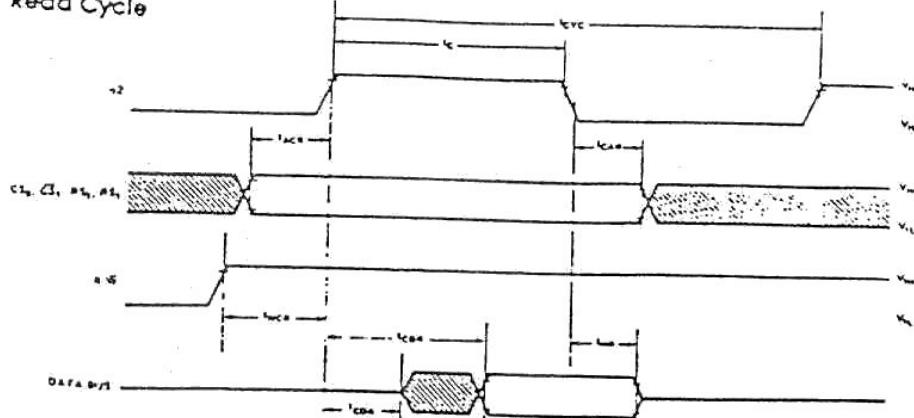


7.6 PLA PROGRAM CHART

PRODUCT TERM			ACTIVE LEVEL		
	INPUT VARIABLE		H H L L L L H L		
N	1 1 1 1 1 1 1				
U	1 1 1 1 1 1 1				
M	1 5 4 3 2 1 0 9 8 1 7 6 5 4 1 3 2 1 0 1		1 7 6 5 4 1 3 2 1 0 1		
=====	=====	=====	=====	=====	=====
0	I - - I - - H I - - I - - I - -		I A . . . I I		
1	I L - - - I - - - I - - - I - - H H I		I A . . . I . . . A . I		
2	I - H H H I L H H - I H L L L I L H H - I		I I A I		
3	I L H H H I L H H - I H L L L I H H H H I		I I . A . . . I		
4	I L H H H I L H H - I H L L H I H H H H H I		I . . A . I I		
5	I - H H H I L L H H - I H - - - I - H - - I		I . A . . I I		
6	I L H H H I L H H - I H H H L I H H H H H I		I . . . A I I		
7	I L H H H I L H H - I H L L H I L H H - I		I I . . . A I		
=====	=====	=====	=====	=====	=====
			A K K A 6 6 P S		
			R E E D 5 5 H P		
			M R Y D 5 2 I E		
			N P R 1 9 2 E		
			O	C	
			R C \$ \$ C H		
			T L F F L		
			K D D K \$		
			\$ 0 1 F		
			F \$ X X D		
			D F 2		
			3 D X		
			X D X		

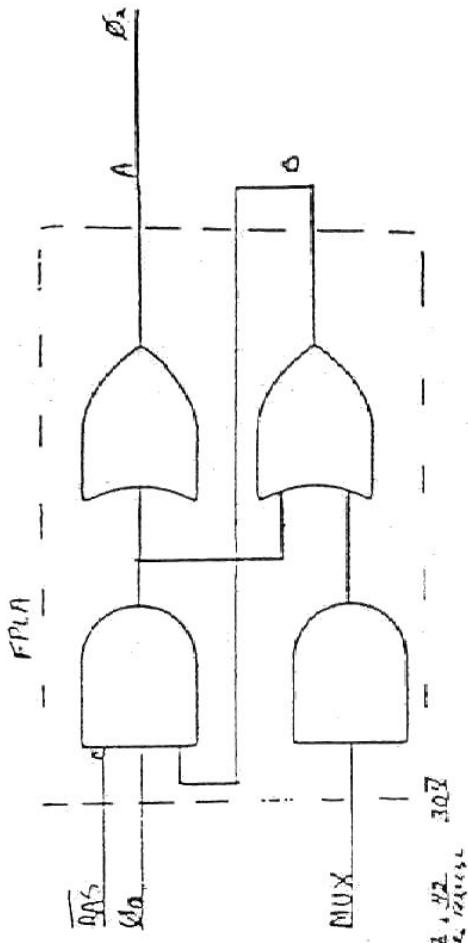

7.7 TED PHI 2 GENERATION

PLA INTERNAL LOGIC

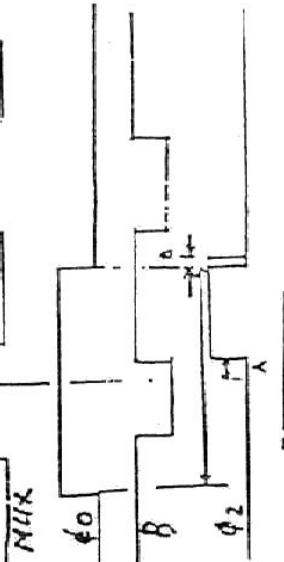

DATE _____

UNLESS OTHERWISE SPECIFIED		DRAWN BY:	
TOLERANCES ON:		CHKO:	
DECIMALS		ENGR:	
.X		APPR:	
.X		USED ON	
.XX		NEXT ASSY:	
.X		REV	
.X		SCALE	
.X		SHEET	
.X		OF	

commodore

RAS

Q₂

TIME

0

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

8. THE VIDEO SECTION

8.1 VIDEO INTERFACE

The TED video interface hardware allows the connection of a standard NTSC or PAL commercial television and/or a color monitor. The monitor may accept either a composite video signal or separate chroma and luminance/sync signals in addition to an audio signal.

8.2 MODULATOR SPECIFICATIONS

The modulator provides a broadcast type RF signal carrying the composite video and audio signals. The NTSC modulator is switchable between channels 3 and 4 to help minimize local broadcast interference. The signal generated by the RF modulator complies with FCC ruling concerning FCC Class B, TV Interface Devices.

8.3 MONITOR OUTPUT

The monitor output provides the following signals:

Luminance/Sync	1 V P-P	75 ohms
Chroma	1 V P-P	75 ohms
Audio	1 V P-P	
Composite	1 V P-P	75 ohms

8.4 VIDEO CONNECTOR PINOUT

The video connector provides the following signals:



FIN	SIGNAL
---	-----
1	Luminance/Sync
2	Ground
3	Audio Out
4	Composite
5	Audio In
6	Chroma
7	N.C.
8	N.C.

9. THE SERIAL BUS

9.1 SERIAL BUS SPECIFICATION

Pin	Type
1	SERIAL SRQIN
2	CMD
3	SERIAL ATN IN/OUT
4	SERIAL CLK IN/OUT
5	SERIAL DATA IN/OUT
6	RESET

DATA BYTES

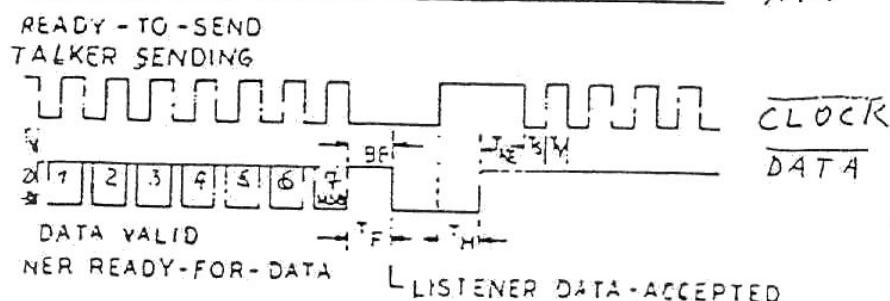

SERIAL BUS TIMING

	SYMBOL	MIN	TYP	MAX.
ATN RESPONSE (REQD.PED) ①	T _{AT}	—	—	1200μs
LISTENER HOLD-OFF	T _H	0	—	∞
NON-EOI RESPONSE TO EFO ②	T _{NE}	—	40μs	200μs
BIT SET-UP TALKER ④	T _S	20μs	70μs	—
DATA VALID	T _V	20μs	20μs	—
FRAME HANDSHAKE ③	T _F	0	20	1000μs
FRAME TO RELEASE TO ATN	T _R	20μs	—	—
BETWEEN BYTES TIME	T _{BS}	100μs	—	—
EOI RESPONSE TIME	T _{YE}	200μs	250μs	—
EOI RESPONSE HOLD TIME ⑤	T _E	60μs	—	—
TALKER RESPONSE LIMIT	T _{RY}	0	30μs	60μs
BYTE-ACKNOWLEDGE ④	T _{PR}	20μs	30μs	—
TALK-ATTENTION RELEASE	T _{TA}	20μs	30μs	100μs
TALK-ATTENTION ACKNOL-DQS	T _{DC}	0	—	—
TALK ATTENTION ACK. HOLD	T _{CA}	50μs	—	—
EOI ACKNOWLEDGE	T _{FR}	60μs	—	—

⑤ TE MIN. MUST BE 80μs FOR EXTERNAL DEVICE TO BE A TALKER.

④ TV AND TPR MIN MUST BE 60μs FOR EXTERNAL DEVICE TO BE A TALKER.

③ IF MAX. TIME EXCEEDED, FRAME ERROR.

② IF MAX. TIME EXCEEDED, EOI RESPONSE REQUIRED.

① IF MAX. TIME EXCEEDED, DEVICE NOT PRESENT ERROR.

NOTES:

10. THE EXPANSION BUS

10.1 EXPANSION BUS PINOUT

PIN	NAME	PIN	NAME
1	GND	A	GND
2	+5	B	C1LOW
3	+5	C	/BRESET
4	/IRQ	D	/RAS
5	R/W	E	PHIO
6	CIHI	F	A15
7	C2LOW(reserved)	H	A14
8	C2HI(reserved)	J	A13
9	/CS1	K	A12
10	/CS0	L	A11
11	/CAS	M	A10
12	MUX	N	A9
13	BA	P	A8
14	D7	R	A7
15	D6	S	A6
16	D5	T	A5
17	D4	U	A4
18	D3	V	A3
19	D2	W	A2
20	D1	X	A1
21	DO	Y	A0
22	AEC	Z	NC
23	EXT AUDIO	AA	NC
24	PHI 2	BB	NC
25	GND	CC	GND

.2 EXPANSION CONNECTOR SIGNAL DESCRIPTION

A0 - A15	SYSTEM ADDRESS BUS - UNBUFFERED. OUTPUT.
DO - D7	SYSTEM DATA BUS -UNBUFFERED. OUTPUT.
/CS0,/CS1	INTERNAL ROM CHIP SELECTS. OUTPUT.
C1LOW,C1HI	EXTERNAL CARTRIDGE CHIP SELECTS. ACTIVE LOW. OUTPU
/RAS	DRAM ROW ADDRESS STROBE. OUTPUT.
MUX	DRAM ADDRESS MULTIPLEX CONTROL SIGNAL. OUTPUT.
/CAS	DRAM COLUMN ADDRESS STROBE. OUTPUT.
BA	BUS AVAILABLE. LOW FOR DMA. OUTPUT ONLY.
I \bar{P} 2	ARTIFICIAL PHI 2. ADDRESS VALID RISING EDGE. DATA VALID FALLING EDGE. OUTPUT.
R/W	SYSTEM READ WRITE LINE. OUTPUT.
/IRQ	INTERUPT REQUEST. INPUT.
/BRESET	BUFFERED RESET. OUTPUT. ,
EXT AUDIO	EXTERNAL AUDIO. INPUT. 1 V P-P FULL SCALE. AC COUPLED.

READ ONLY MEMORY

11.1 SYSTEM ROM DESCRIPTION

In a basic configuration, the TED operating system resides in 32K of read only memory contained in two 16K X 8 ROM. The KERNEL resides in the upper 16K ROM (referred to as HIGH ROM) and some of the lower 16K ROM (LOW ROM). The Kernel, by definition, is the operating system of the computer, with fixed entry points into usable subroutines to facilitate use by higher level programs. The entry table for the Kernel is located above the 7360 in memory. (\$FF40 - \$FFF9) Contained in the space allocated for the Kernel is the character ROM at location \$0000 - \$D7FF. "BASIC" is contained in the lower ROM not used by the Kernel.

11.2 BANKING ROM OPERATION

Although the system can only "see" 32K of ROM at a time, up to 64K can be installed on board, with an additional 32K on as external cartridge. This is possible using the scheme known as "banking". Banking is accomplished by writing to the address range of \$FDD0 - \$FDDF. When a write to this address range occurs, the lower four bits of the address bus select 2 of 8 banks (each 16K). Refer to the chart below.

A0	A1	BANK
----	----	------

0	0	low internal #1, "BASIC"
0	1	low internal #2, "FUNCTION LOW"
1	0	low external #1, "CARTRIDGE LOW"
1	1	reserved

A2	A3	BANK
----	----	------

0	0	hi internal #1, "KERNEL"
0	1	hi internal #2, "FUNCTION HI"
1	0	hi external #1, "CARTRIDGE HI"
1	1	reserved

Even when the Kernel is banked out, part of the Kernel remains accessible. This is the part of the Kernel that does the actual banking and is located in the address range of \$FC00 to \$FCFF. This section of ROM will not assert itself if ROM is banked out for RAM.

11.3 ROM ELECTRICAL SPEC

Absolute Maximum Ratings

INPUT VOLTAGE (Vin)	-.5V to +7.0 VDC
SUPPLY VOLTAGE (Vcc)	-.5V to +7.0 VDC
OPERATING TEMP (Ta)	0 to 70 °C
STORAGE TEMP	-55 to 150 °C

I.C. Characteristics

INPUT LEAKAGE CURRENT	-10 uA
DYNAMIC CHARACTERISTICS	Vcc = 5.0V +/-5%
INPUT HIGH VOLTAGE (VIH)	Vss+2.4V to Vcc+1V
INPUT LOW VOLTAGE (VIL)	VSS-.5V to Vss+.8V
OUTPUT HIGH VOLTAGE (VOH) (IOH=-200uA VCC=4.75VDC)	VSS+2.4V
OUTPUT LOW VOLTAGE (VOL) (IOL=-3.2mA VCC=5.25V)	VSS+.4V
MAX POWER SUPPLY CURRENT	120 mA

11.4 23128 ROM PINOUT


PIN	NAME	DESCRIPTION
1	NC	
2	A12	ADDRESS BIT 12
3	A7	ADDRESS BIT 7
4	A6	ADDRESS BIT 6
5	A5	ADDRESS BIT 5
6	A4	ADDRESS BIT 4
7	A3	ADDRESS BIT 3
8	A2	ADDRESS BIT 2
9	A1	ADDRESS BIT 1
10	A0	ADDRESS BIT 0
11	D0	DATA BIT 0
12	D1	DATA BIT 1
13	D2	DATA BIT 2
14	GND	POWER SUPPLY GROUND
15	D3	DATA BIT 3
16	D4	DATA BIT 4
17	D5	DATA BIT 5
18	D6	DATA BIT 6
19	D7	DATA BIT 7
20	/CS	CHIP SELECT / ACTIVE LOW
21	A10	ADDRESS BIT 10
22	/CE	CHIP ENABLE / ACTIVE LOW
23	A11	ADDRESS BIT 11
24	A9	ADDRESS BIT 9
25	A8	ADDRESS BIT 8
26	A13	ADDRESS BIT 13
27	CS or CE	CHIP SELECT OR CHIP ENABLE / ACTIVE HIGH
28	VCC	POWER SUPPLY +5

11.5 ROM TIMING SPECIFICATION

PARAMETER	SYMBOL	MIN.	MAX.
-----------	--------	------	------

ACCESS TIME	TACC	300	-	ns
OUTPUT ENABLE	TOE	120	-	ns

Note: TACC available from system is 338ns and TOE available is 12 ns

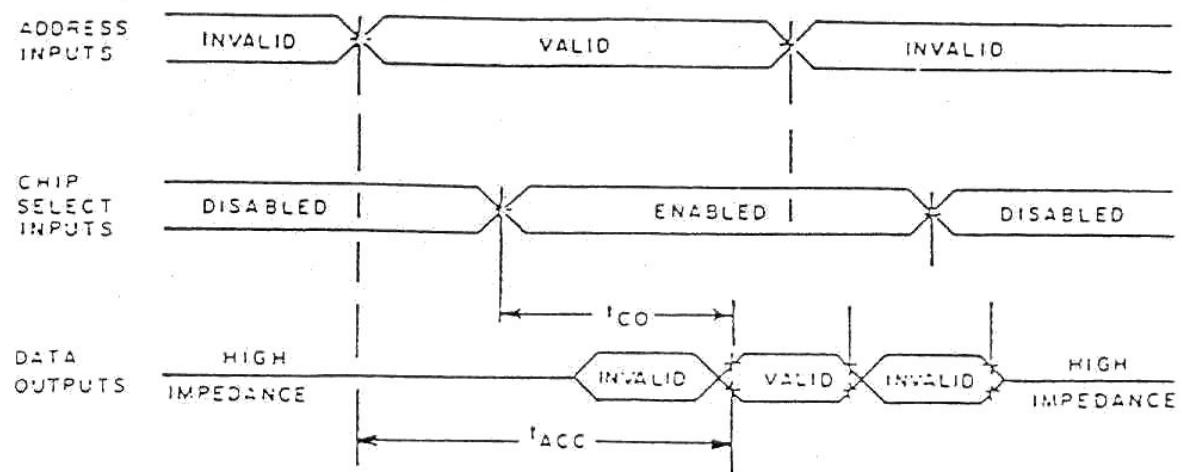

2. THE KEYBOARD


12.1. KEYBOARD CONNECTOR PINOUT

PIN NAME DESCRIPTION

1	D5	DATA BIT 5
2	K7	KEY LATCH BIT 7
3	GND	LED GND
4	+5V	LED +5VOLT 20mA MAX.
5	D7	DATA BIT 7
6	K4	KEY LATCH BIT 4
7	D1	DATA BIT 1
8	K5	KEY LATCH BIT 5
9	K6	KEY LATCH BIT 6
10	D3	DATA BIT 3
11	D2	DATA BIT 2
12	D4	DATA BIT 4
13	K2	KEY LATCH BIT 2
14	K1	KEY LATCH BIT 1
15	D6	DATA BIT 6
16	K3	KEY LATCH BIT 3
17	K0	KEY LATCH BIT 0
18	D0	DATA BIT 0

Plus 4 C16

KEYBOARD MATRIX

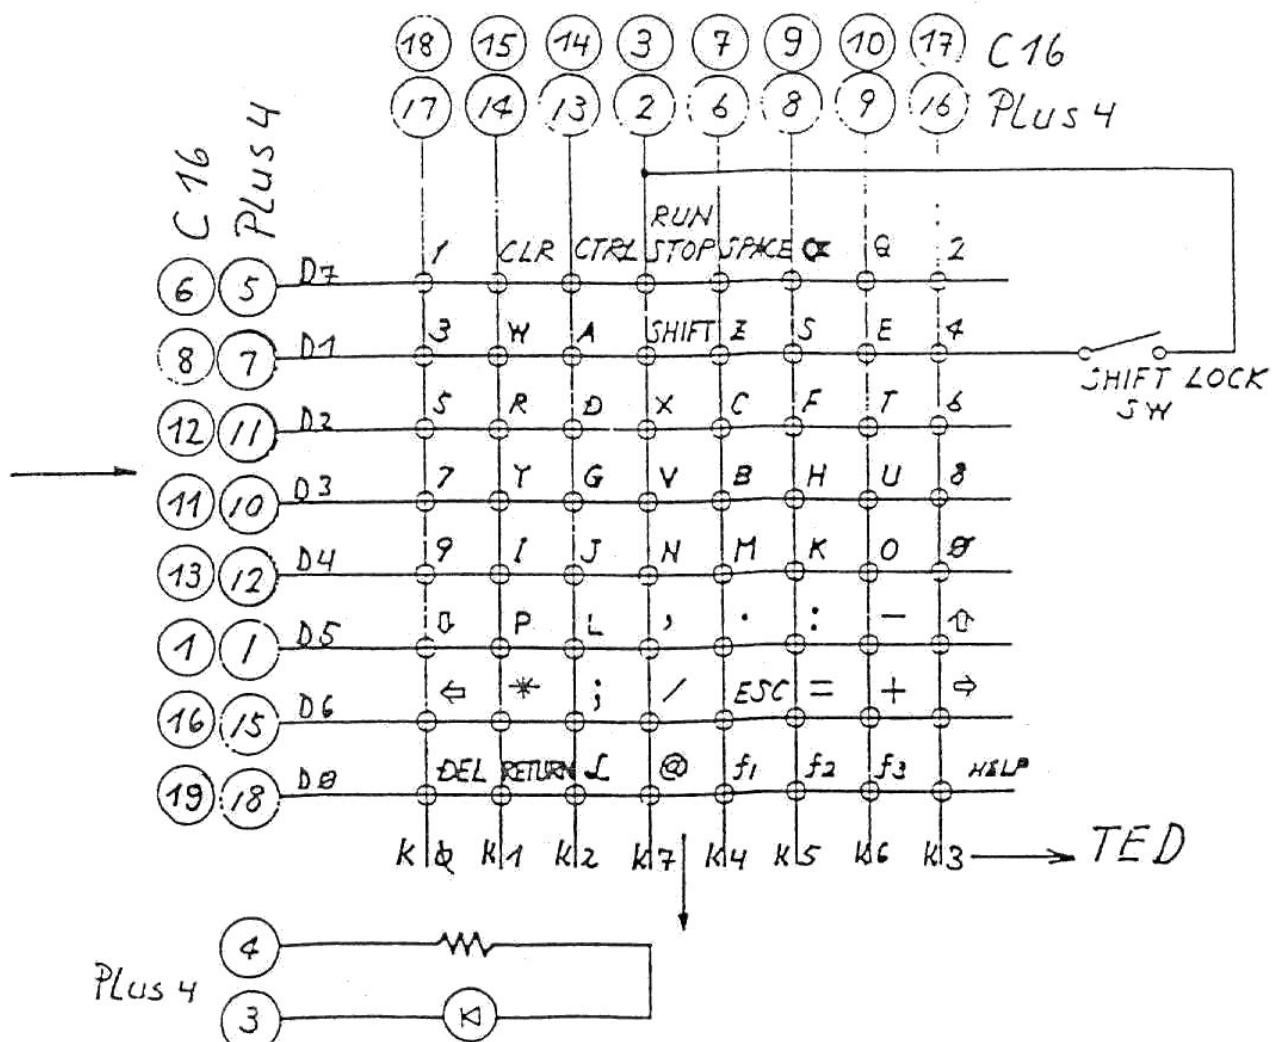

3 KEYBOARD ELECTRICAL SPECIFICATION

- | | |
|--|---|
| 1) MAXIMUM RATING | 12VDC, 200 μ S PULSE WIDTH 1/50 DUTY CYCLE
1mA |
| 2) CHATTERING | 5mSEC INITIAL, 10mSEC OVER LIFE |
| 3) CONTACT RESISTANCE | 500 OHM MAX. |
| 4) CAPACITANCE | 100PF MAX |
| 5) INSULATION RES. | 50M OHM MIN. |
| 6) WITHSTAND VOLTAGE | 250VAC 1min. |
| 7) OPERATING FORCE | 65g TYP. |
| ZERO TRAV FORCE 15 \pm 10g AT .5mm TRAV | |
| FULL TRAV FORCE 90 \pm 25g AT .5mm ABOVE FULL TRAV | |
| 8) OPERATING LIFE | 500 MILLION TIMES |
| FUNCTION KEYS | 300 MILLION TIMES |
| 9) OPERATING TEMP | -5 - +50 °C |
| 10) STORAGE TEMP | -20 - +65°C |